

TOPIARY

RIGID*FORM*™ LVT

Milliken

TOPIARY RIGID*FORM*™ LVT

Strike a balance with embossed textures and acoustic features.

The Topiary LVT collection elevates resilient flooring with a precision-embossed texture and a natural colour palette. Its refined matte finish softens the shine of traditional hybrids, creating an authentic surface that is almost indistinguishable from real timber. Supported by RigidForm™ construction with an integrated pad layer, it delivers outstanding acoustics and seamless installation for projects of every scale.

Topiary in Shaded Ash | EWH-7318 | SecureLock™ Locking Mechanism

10 COLOURWAYS
Tailored Flexibility

SHADED ASH
EWH-7318

SCANDI OAK
EWH-7310

STRINGY BARK
EWH-7302

BANKSIA
EWH-7324

MYRTLE
EWH-7323

SPOTTED GUM
CWH-1907

DUSKY OAK
EWH-7300

BLACKBUTT
CWH-1916

PLUM WALNUT
EWH-7304

BLUE GUM
EWH-7042



Topiary in Myrtle | EWH-7323 | SecureLock™ Locking Mechanism

Topiary in Spotted Gum | CWH-1907 | SecureLock™ Locking Mechanism



Topiary in Scandi Oak | EWH-7310 | SecureLock™ Locking Mechanism



Topiary in Scandi Oak
EWH-7310

Topiary in Stringy Bark
EWH-7302





Topiary in Stringy Bark | EWH-7302 | SecureLock™ Locking Mechanism

Topiary in Dusky Oak | EWH-7300 | SecureLock™ Locking Mechanism



Topiary in Plum Walnut | EWH-7304 | SecureLock™ Locking Mechanism

Topiary in Blue Gum | EWH-7042 | SecureLock™ Locking Mechanism



Topiary in Banksia | EWH-7324 | SecureLock™ Locking Mechanism



Topiary in Banksia
EWH-7324

Topiary in Blackbutt
CWH-1916





Topiary in Stringy Bark | EWH-7302 | SecureLock™ Locking Mechanism

COLOURWAY

SHADED ASH | EWH-7318





PLANK SIZE
6mm x 232mm x 1532mm

SCANDI OAK | EWH-7310





PLANK SIZE
6mm x 232mm x 1532mm

STRINGY BARK | EWH-7302





PLANK SIZE
6mm x 232mm x 1532mm


BANKSIA | EWH-7324





PLANK SIZE
6mm x 232mm x 1532mm

MYRTLE | EWH-7323

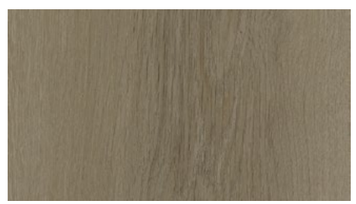
PLANK SIZE
6mm x 232mm x 1532mm

COLOURWAY

SPOTTED GUM | CWH-1907





PLANK SIZE
6mm x 232mm x 1532mm

DUSKY OAK | EWH-7300





PLANK SIZE
6mm x 232mm x 1532mm

BLACKBUTT | CWH-1916





PLANK SIZE
6mm x 232mm x 1532mm


PLUM WALNUT | EWH-7304





PLANK SIZE
6mm x 232mm x 1532mm

BLUE GUM | EWH-7042

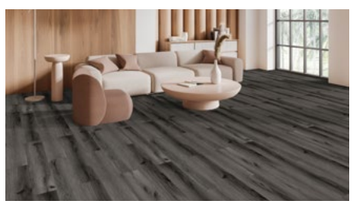



PLANK SIZE
6mm x 232mm x 1532mm



It takes humans to protect humanity.

Make changes to end climate change.
Design a better future.

M/PACT™
CARBON NEUTRAL PROGRAM

CLIMATE CHANGE IS ONE OF THE GREATEST THREATS FACING HUMANITY, AND WE ARE ALL RESPONSIBLE.

That's why Milliken Floor Covering launched the **M/PACT™** carbon neutral program. Today, our carpet, LVT and entrance flooring tiles are carbon neutral everywhere in the world.

M/PACT carbon neutral products offset the raw materials and manufacturing carbon footprint* by using 3rd party Verified Carbon Standard Credits that support renewable energy and carbon reduction technologies to help fight climate change. When you choose M/PACT products, you can be sure your choice is carbon neutral.

SCAN TO LEARN MORE ABOUT
OUR CARBON NEUTRAL PROGRAM
M/PACT™

M/PACT™
CARBON NEUTRAL PROGRAM

Investment
Today we invest through renewable energy credits, verified carbon offsets, and installing solar power at our Sydney manufacturing facility. We also continue to invest in more efficient manufacturing technologies and in local supply chains.

Materials
We believe material health is essential to enable circularity. The use of materials that don't contain harmful chemicals provides a critical pathway to end-of-life product recycling. Our carpet, LVT and entrance flooring tiles are recyclable.

Dematerialisation
We continue to support the advancement of a circular economy – one that uses less new raw materials and creates less waste. For example, we have created a portfolio of carpet tiles that use less raw material, reducing embodied carbon. We will continue to challenge ourselves and our supply chains to extend innovation in new technologies for dematerialisation.

Manufacturing
We leverage our global manufacturing and local supply chains to minimise carbon emissions. More efficient manufacturing and distribution not only reduces our global carbon footprint, it also has a direct positive impact on the communities we call home.

Wellness
Climate change directly impacts human health and wellness. Pollution. Natural disasters. Droughts. As a founding member of the Well Living Lab and a Well Portfolio Member, we aspire to design products that enhance well-being and quality of life of indoor spaces.

We will continue to do more to lower our carbon footprint.
The M/PACT™ program is long-term, because the fight to stop climate change will be a long one. As a global manufacturing company, we set 2025 goals that align with the United Nations Sustainable Development Goals. We push ourselves to meet our targets on Planet, Product, and People, including a 25% reduction in indexed greenhouse emissions by 2025. These 2025 goals are a benchmark for us to achieve more, faster. We encourage you to specify our carbon neutral products for all of your projects to ensure the climate change journey continues.

Together, we can make a positive **M/PACT™** on the world for generations.

* As calculated and verified scope A1-3 GWP through a ISO14025/ ISO14040 compliant LCA and published in third party EPDs.

Milliken™



Topiary in Shaded Ash | EWH-7318
SecureLock™ Locking Mechanism

TOPIARY

RIGID*FORM*™ LVT

SPECIFICATION

M/PACT™ CARBON NEUTRAL PROGRAM

When you choose M/PACT™ products, you can be sure your choice is carbon neutral. M/PACT™ carbon neutral products offset the raw materials and manufacturing carbon footprint* by using 3rd party Verified Carbon Standard Credits that support renewable energy and carbon reduction technologies to help fight climate change.
*as calculated and verified through a ISO14025/ISO14040 compliant LCA and published in third party **EPD**.

Acoustic Value	Impact Sound Pressure Level - Ln,w = 39dB Improvement of Impact Sound - △Lw = 19dB

Construction
High Performance Rigid Core Flooring

Finish
Anti-Microbial UV Coating

Wear Layer Thickness
0.50mm

Tile Size
6mm x 232mm x 1532mm

Overall Thickness
6mm

Edge Profile
Cut-Bevel

M^2 Per Box
2.133

Boxes Per Pallet
48

M^2 Per Pallet
102.384

Critical Radiant Flux (AS ISO 9239-1)
10.7 kW/m^2

Smoke Rate (AS ISO 9239-1)
105%.min

Use Classification (ISO 10582)
Class 33 Heavy Duty Commercial

Slip Resistance Classification
P3 & R9

Heat Stability of Colour Change (ASTM F1514)
PASS

Light Stability (ASTM F1515)
PASS

Static Coefficient of Friction (ASTM D2047)
PASS

Dimensional Stability & Curling after Exposure to Heat (ISO 23999)
≤ 0.15%; Curl ≤ 1mm

Resistance to Chemicals (ASTM F925)
PASS

Residual Indentation (ISO 24343-1)
≤ 0.1mm

Static Load Limit (ASTM F970)
PASS

Castor Chair Resistance (ISO 4918)
PASS

Flexibility (ISO 24344)
PASS

Colour Fastness to Light (ISO 105-BO2)
≥ 6

Environmental
M/PACT™ Carbon Neutral Program

GreenRate Level A by Global GreenTag

Best Environmental Practice PVC

Works with WELL

Recommended Installation Method(s):
SecureLock™ locking mechanism
Ashlar | Brick | Stagger

Recommended Area of Use:
Commercial | Residential

Warranties:
20-year Limited Commercial Wear Warranty

LVT ENVIRONMENTAL STANDARDS
Milliken LVT is durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% phthalate free.

Images in this brochure are approximate for colour and pattern scale. Please use actual LVT samples to make your final selections.

Cover Image: Topiary in Shaded Ash | EWH7318 | SecureLock™ Locking Mechanism

Australia:
Toll Free: 1800 668 372

New Zealand:
Toll Free: 0800 668 372

www.millikenfloors.com.au
(Australia & New Zealand)

Milliken Hybrid Flooring System is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken Hybrid Flooring System is 100% ortho-phthalate-free. Milliken Hybrid Flooring System is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.

© 2025 Milliken & Company | Design © Milliken & Company