

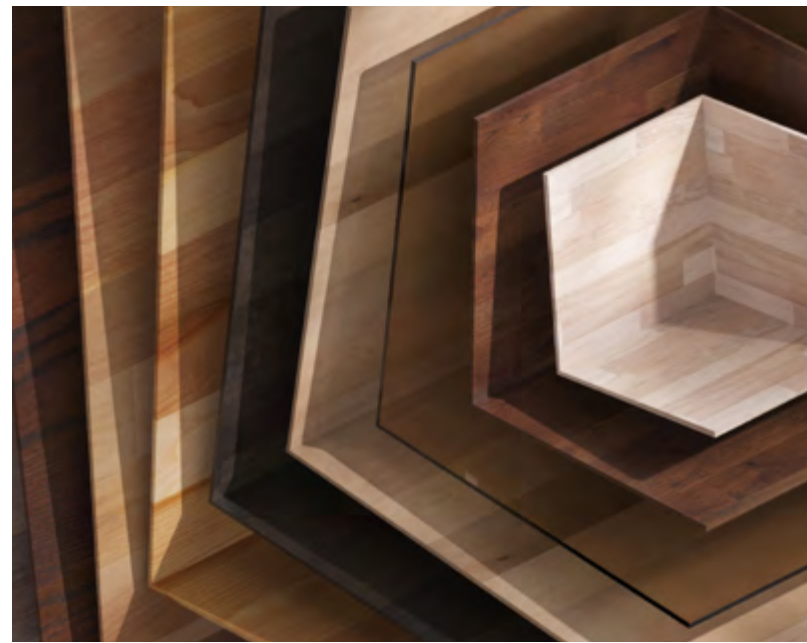


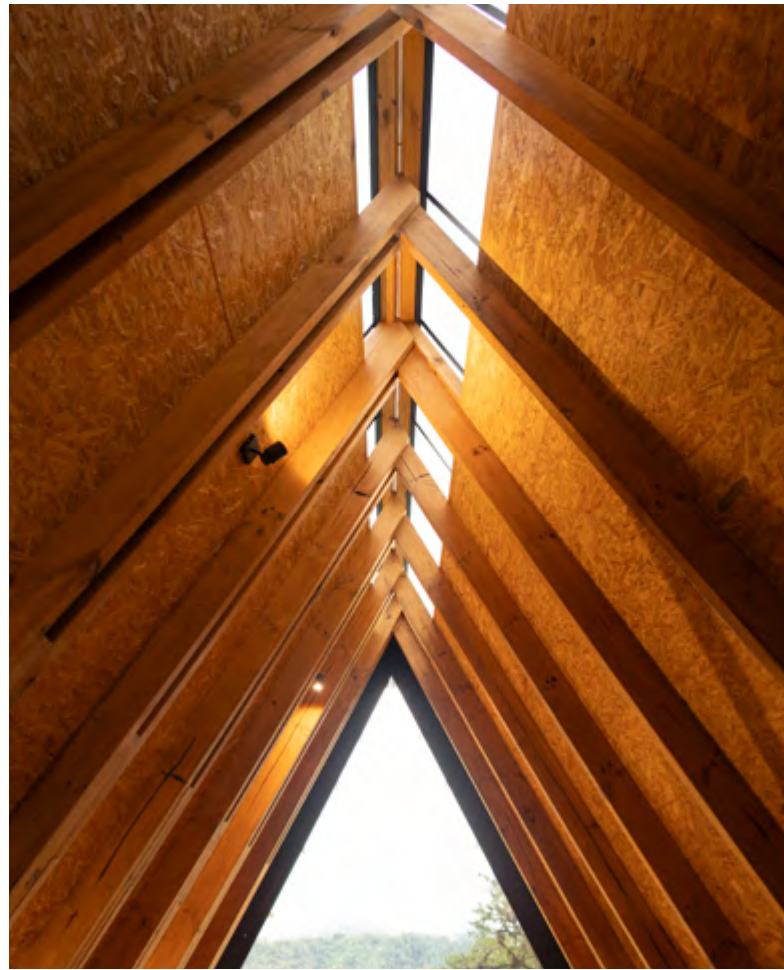

SYMMETRY

Tessellation / Chevron /
Clean Grain / Pressed Grain / Striae Grain

Milliken®

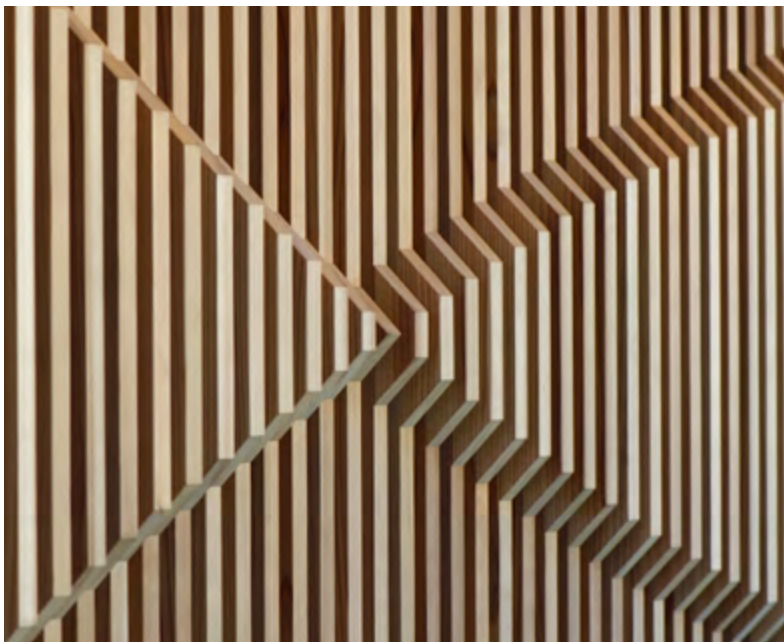

SYMMETRY

The Symmetry Collection explores the quiet harmony between nature and structure—where the organic irregularity of wood grain meets the precision of geometric order. By balancing natural variation with intentional pattern, the collection creates a sense of calm, rhythm, and visual equilibrium within a space.



TESSELLATION

457.2 x 457.2mm

Interlocking geometric forms—such as diamonds and hexagons—come together in a seamless parquet layout. The repeating structure creates a meditative field, offering architectural clarity while maintaining warmth and material richness.

CHEVRON

228.6 x 1524mm

Defined by continuous diagonals and repeating V formations, Symmetry Chevron introduces a sense of movement through precise geometry. The pattern balances directional energy with visual order, creating rhythm across the floor while maintaining a calm, composed aesthetic.

CHEVRON
Right

CHEVRON
Left





CLEAN GRAIN

184.15 x 1219.2mm

Smooth, understated grain with a calm, uniform flow.



CLG206
FAWN



PRESSED GRAIN

184.15 x 1219.2mm

Subtle compression and texture
for added depth.



PSG22
BARLEY



STRIAE GRAIN

184.15 x 1219.2mm

Fine linear striations that introduce gentle movement.



STG22
BARLEY



SYMMETRY GRAIN

184.15 x 1219.2mm

A refined expression of wood in its purest form. Each grain is carefully curated to achieve a serene, balanced appearance across the floor, minimizing visual noise while preserving natural character.

CLEAN
GRAIN



PRESSED
GRAIN



STRIAE
GRAIN





(from left to right)
CHV15 Mesmerize
PSG15 Tumbleweed

CLG15 Tumbleweed
PSG22 Barley
STG22 Barley

STG206 Fawn
CLG206 Fawn
TSL22 Barley




Tessellation in Barley, (insert) Striae Grain in Barley, *ashlar installation*



Pressed Grain in Tumbleweed, *ashlar* installation;
(insert) Echoes in Mid Crust Emerald Green,
Vista in Emerald Green, *monolithic* installation



INSTALLATION

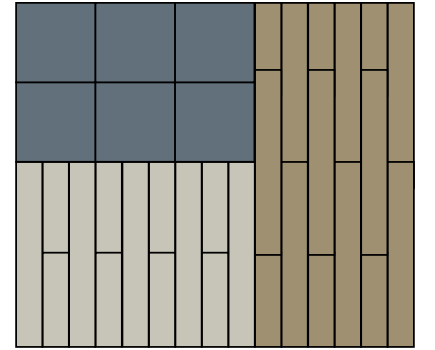

STG206
Fawn

CLG15
Tumbleweed



WOC196-152-180
Dove with Midnight Blue

(workstation) Striae Grain in Fawn, (corridor) Clean Grain in Tumbleweed,
(meeting room) Woven Contours in Dove with Midnight Blue, *ashlar installation*



(from left to right)
PSG145 Burlywood
PSG286 Straw

CHV286 Thrive
TSL286 Straw
CLG219 Eggshell





Clean Grain in Eggshell, *ashlar* installation



Chevron in Thrive, ashlar installation



INSTALLATION

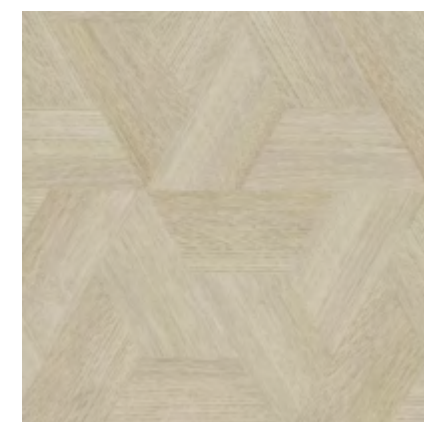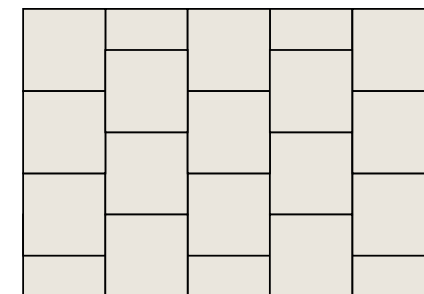

TSL286 Straw



(workstation) Pressed Grain in Straw, (corridor) Pressed Grain in Burlywood,
(meeting room) Pattern Play in Papyrus, Pattern Play Transition in Papyrus Buttercream,
Pattern Play in Buttercream, *ashlar installation*



(from left to right)
PSG214 Harvest
PSG210 Bran

TSL211 Rye
CHV210 Bran
CLG211 Rye



Clean Grain in Rye, *ashlar* installation




(from left to right) Clean Grain in Rye, Tessellation in Rye, *ashlar installation*,
Clean Grain in Rye, Pressed Grain in Bran, *random ashlar installation*



Chevron in Bran, ashlar installation



INSTALLATION

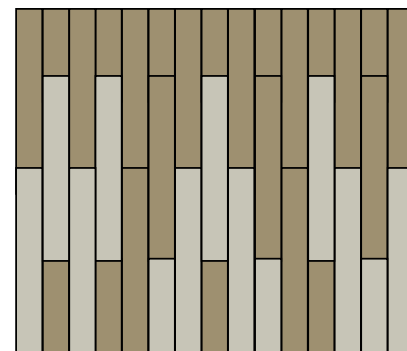

PSG210
Bran



PSG214
Harvest



(from left to right)
CHV145 Abundance
CLG145 Wenge

TSL145 Wenge
CLG176 Rosy Brown





Tessellation in Wenge, *ashlar* installation



Clean Grain in Wenge, Clean Grain in Rosy Brown, *random installation*



INSTALLATION

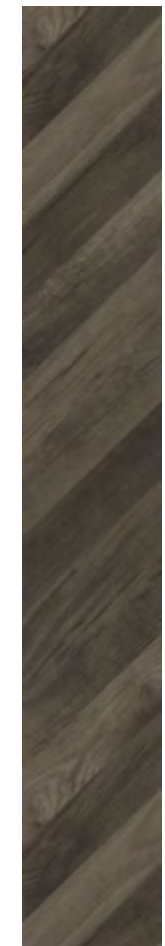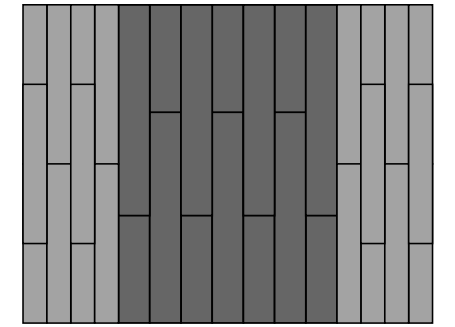

CHV145
Abundance



CLG145
Wenge


Tessellation

Chevron


Clean Grain

Pressed Grain

Striae Grain



TSL22 Barley

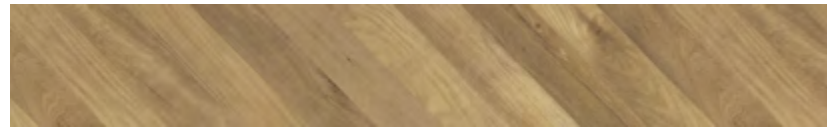


CHV15 Mesmerize




CLG206 Fawn




PSG22 Barley



STG206 Fawn



TSL286 Straw



CHV286 Thrive




CLG219 Eggshell




PSG286 Straw



PSG145 Burlywood



TSL211 Rye



CHV210 Bran




CLG211 Rye



PSG210 Bran



PSG214 Harvest



TSL145 Wenge



CHV145 Abundance



CLG176 Rosy Brown



CLG145 Wenge

S Y M M E T R Y
C O L O R L I N E

M/PACT™

CARBON OFFSET PROGRAM

SYMMETRY IS A CARBON NEUTRAL COLLECTION


Climate change is one of the greatest threats facing humanity. Today, our carpet, LVT and entryway tiles are carbon neutral everywhere in the world. We invite you to learn more about the significant changes we've made, then let's work together to design a better future.

LEARN MORE ►



VIEW SYMMETRY IN YOUR SPACE

Use the online visualiser to view different layouts of Symmetry. Simply upload a photograph of your space and let the visualiser do the rest.

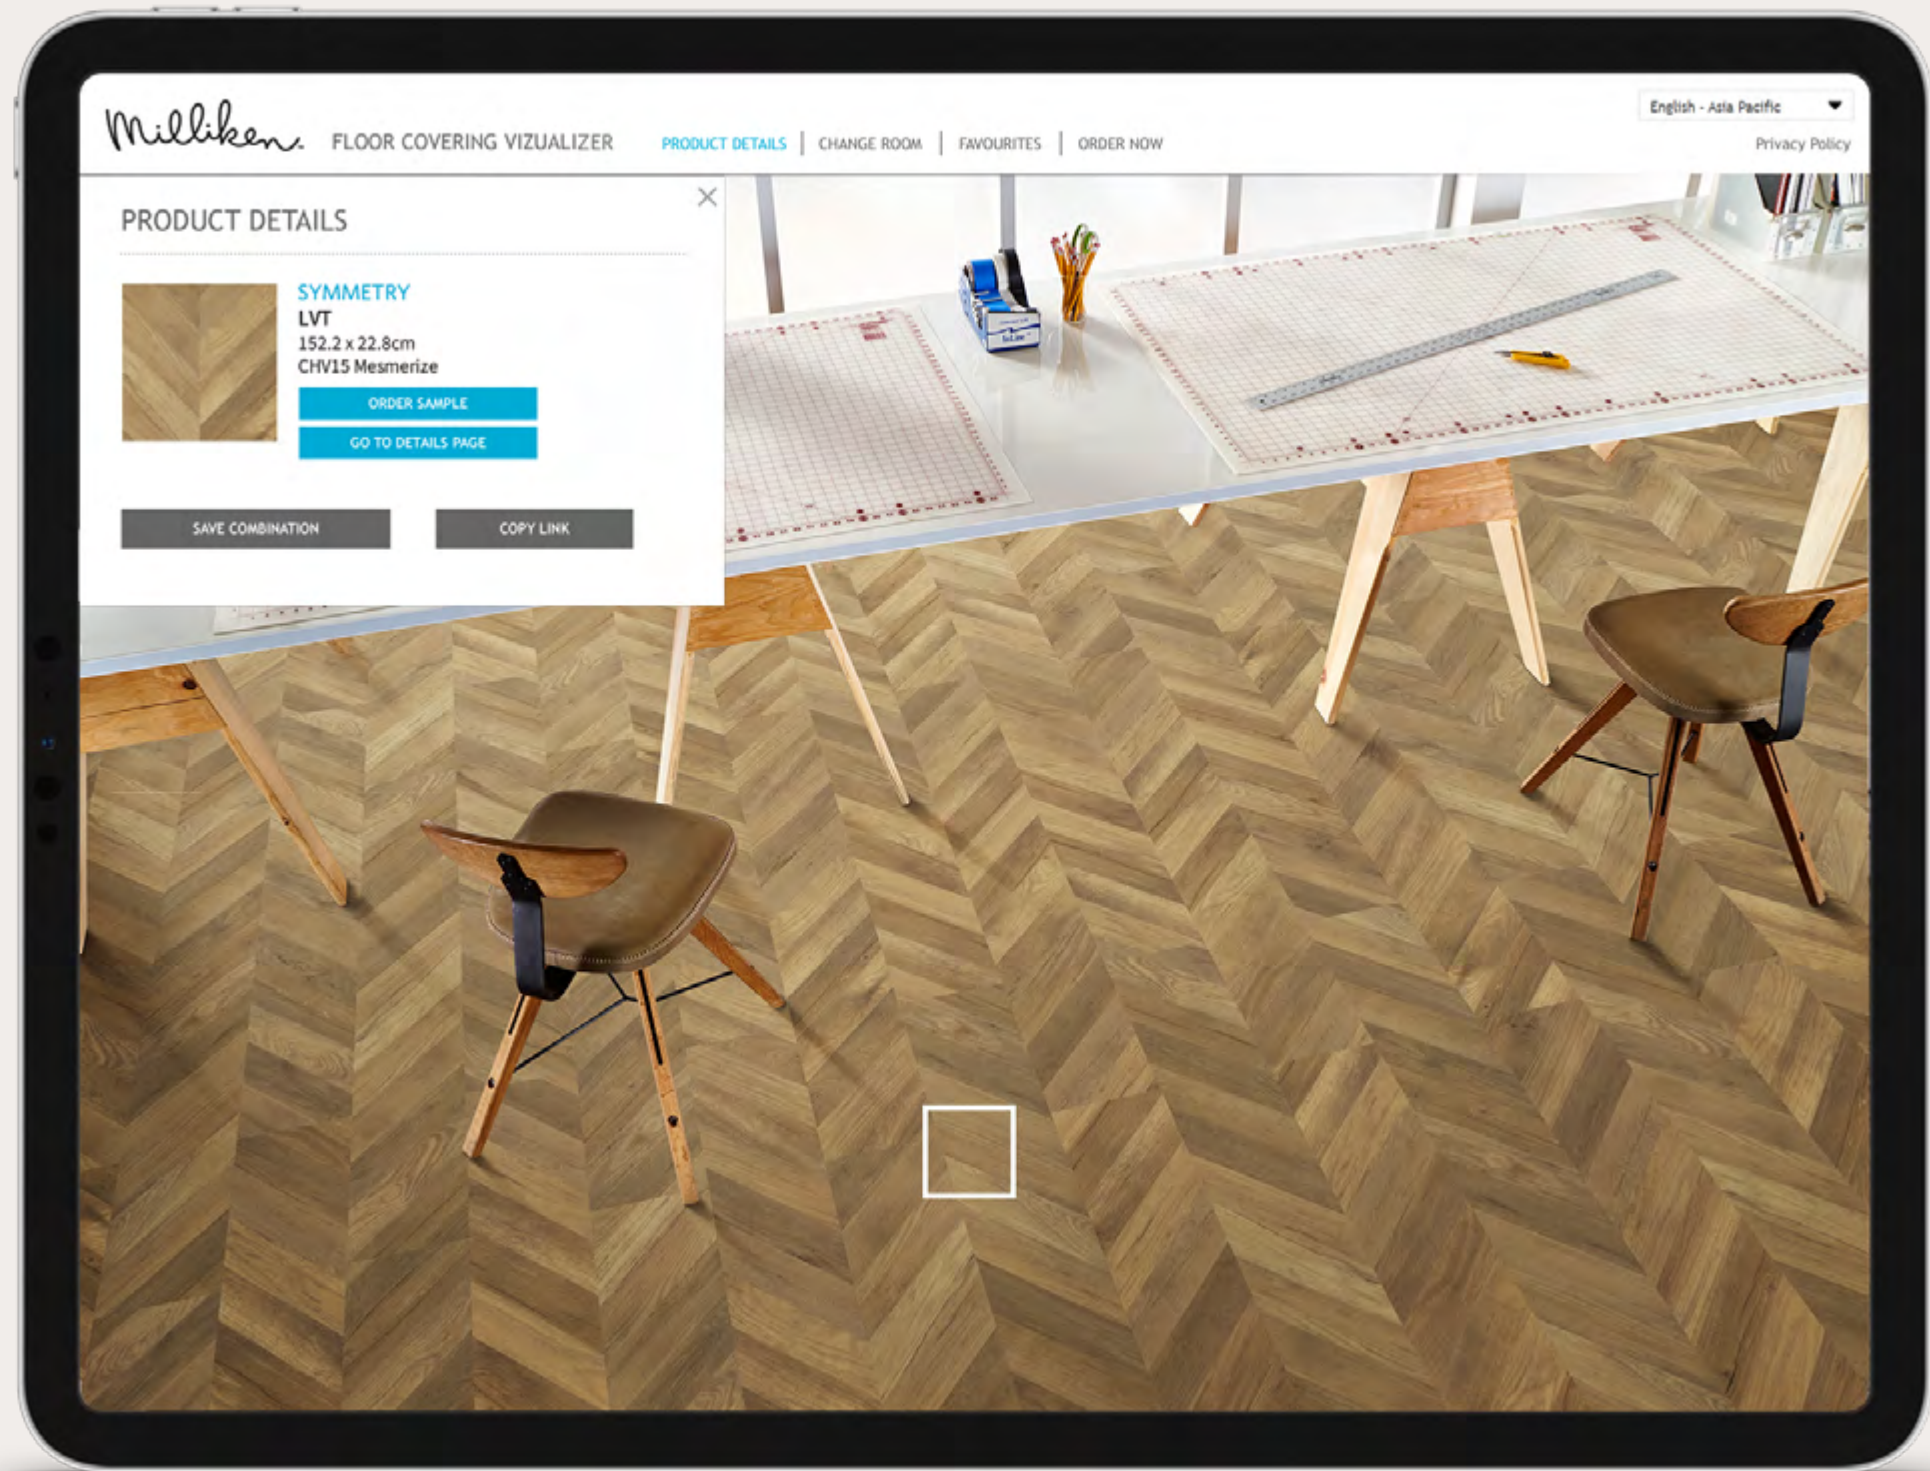

Visualize now at
millikenfloors.com



Tessellation in Barley, (insert) Striae Grain in Barley, *ashlar installation*

Milliken

www.millikenfloors.com

SYMMETRY FLEXFORM™ LVT

Construction

High Performance FlexForm™ LVT

Finish

ProGuard MAX™ Reinforced Polyurethane Coating

Overall Thickness

5mm

Wear Layer Thickness

0.55mm

Edge Profile

Micro Bevel

Tile Sizes

Clean Grain/Pressed Grain/Striae Grain:

184.15mm x 1219.2mm,

Chevron: 228.6mm x 1524mm,

Tessellation: 457.2mm x 457.2mm

Pieces Per Box

Chevron: 6, others: 10

Weight Per Box

Clean Grain/Pressed Grain/Striae Grain: 21.5kg,

Chevron: 20.04kg, Tessellation: 20.9kg

Quantity Per Box

Clean Grain/Pressed Grain/Striae Grain: 2.25m²,

Chevron: 2.09m², Tessellation: 2.09m²

Critical Radiant Flux (ISO 9239-1)

≥ 4.5 kW/m²

Smoke Rate (ISO 9239-1)

< 750%.min

Use Classification (ISO 10582)

Class 33 Heavy Commercial

Colour Fastness to Light (ISO 105-B02)

≥ 6

Slip Resistance (DIN 51130)

R10

Dimensional Stability (ISO 23999)

≤ 0.25% ; Curl ≤ 2 mm

Resistance to Chemicals (ASTM F925)

Pass

Residual Indentation (ISO 24343-1)

≤ 0.1 mm

Castor Chair Resistance (ISO 4918)

Pass

Flexibility (ISO 24344)

Pass

Warranty

15-Year Limited Commercial Wear Warranty

产品结构

高性能弹性地板

表层工艺

ProGuard MAX™ 增强聚氨酯涂层

总厚度

5mm

耐磨层厚度

0.55mm

倒角类型

微倒角

单片尺寸

Clean Grain/Pressed Grain/Striae Grain:

184.15mm x 1219.2mm,

Chevron: 228.6mm x 1524mm,

Tessellation: 457.2mm x 457.2mm

每箱片数

Chevron: 6, others: 10

每箱重量

Clean Grain/Pressed Grain/Striae Grain: 21.5kg,

Chevron: 20.04kg, Tessellation: 20.9kg

每箱数量

Clean Grain/Pressed Grain/Striae Grain: 2.25m²,

Chevron: 2.09m², Tessellation: 2.09m²

临界辐射通量 (阻燃性) (ISO 9239-1)

≥ 4.5 kW/m²

产烟量 (ISO 9239-1)

< 750%.min

应用分级 (ISO 10582)

商业重度 33 级

光照色牢度 (ISO 105-B02)

≥ 6

防滑性能 (DIN 51130)

R10

加热尺寸稳定性及翘曲 (ISO 23999)

≤ 0.25% ; 翘曲 ≤ 2 mm

耐化学性能 (ASTM F925)

通过

残余凹陷 (ISO 24343-1)

≤ 0.1 mm

脚轮椅测试 (ISO 4918)

通过

柔韧性 (ISO 24344)

通过

质保

15年商用耐磨层有限质保

LVT ENVIRONMENTAL STANDARDS

Milliken LVT is highly durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% ortho-phthalate-free. Milliken LVT is manufactured at facilities that are ISO 9001 and ISO 14001 compliant.



Declare.



Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Images in this brochure are approximate for color and pattern scale. Please use actual product samples to make your final selections.